


E-POD SYSTEM 2000 (+)

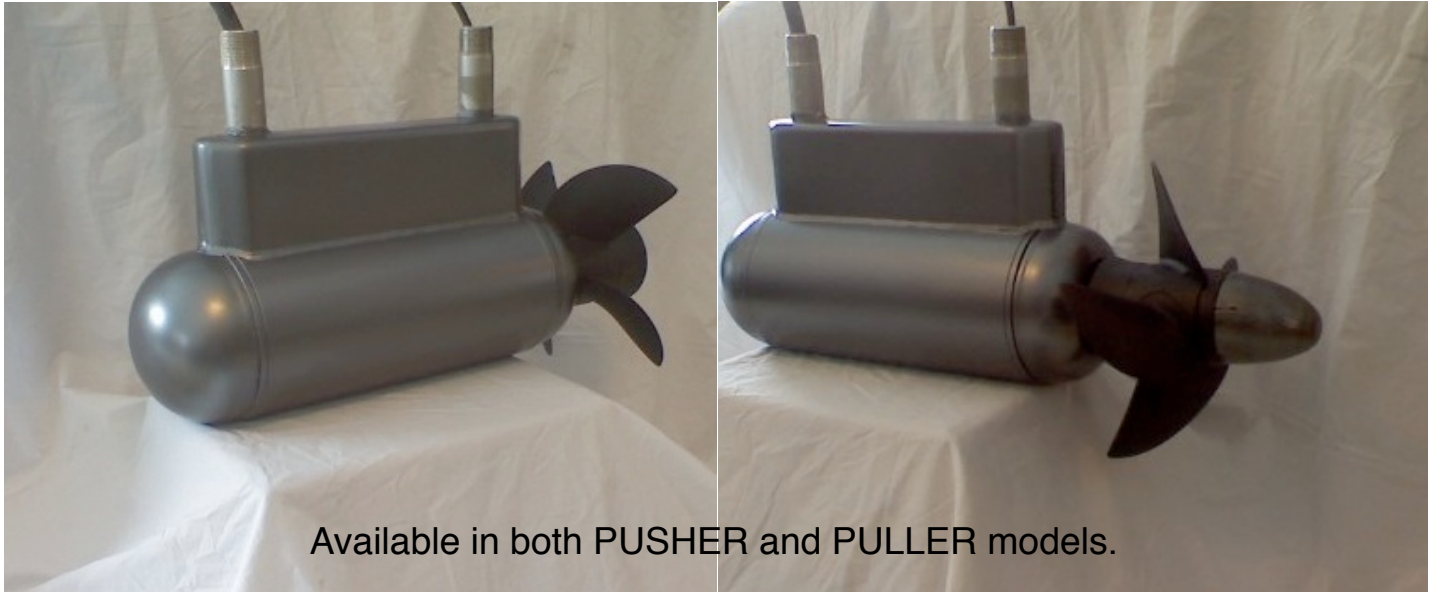

Available in both PUSHER and PULLER models.

Technical Specifications of the new E-POD System 2000 & 2000+

Operates on 24-48 volts DC

AMPERAGE Peak 300 Max continuous 170

Recommended Cruise..... 30-50 amps

DIMENSIONS

Puller = 22 Inches long (including 6 inch shaft) 635 mm

Pusher = 24 Inches long (including 6 inch shaft)

Motor body is 6 inches in diameter 152 mm

10.4 inch diameter, 4 blade composite prop (adjustable from 12-16 inch pitch)

Distance from top of mounting faring to bottom of prop is 12 inches (305 mm)

Distance between centers on wiring/mounting pipes is 9.5 inches (241 mm)

WEIGHT 50 pounds (23 kilos)

NOTE: (all units come with regenerative charging)

The system 2000 comes standard with everything you need to make the motor work, (less batteries). It includes the prop, motor, motor controller, and helm controls.

The “+” plus model comes with the PakTrakr Battery monitor and the separate regenerative charge controller circuit.



PakTrakr comes standard on + model and is available on the standard 2000.